

LEHNER
LIFTTECHNIK

SSS
Elevators & Escalators

+961 25 803965 | +961 81 060 038



DELTA

PLATFORM STAIRLIFT

DELTA

The straight stairlift Delta is the perfect solution to make indoor and outdoor staircases accessible for wheelchair users. The designerlift fits perfectly into any environment.

Reliability

Rigid platform mechanics and robust electronics provide for a low-maintenance performance and a high reliability of the platform functions, also in wet or cold conditions.

Safety

Numerous safety mechanisms fulfill the highest technical standards - TÜV certified according to the European Norm EN 81-40.

Comfort

Fully automatic platform functions and ergonomic controls allow a simple and comfortable control of the platform.

Space miracle: The lift requires only 300 mm from the wall when folded



Platform may be **coated in any RAL colour** to elegantly fit in any surrounding or bring some colour into grey spaces



Robust platform mechanics allow for installation in cold or wet environment



Main advantages of the Delta stairlift


- Extremely slim and aesthetic design
- Installation on very narrow staircases
- Custom-made platform sizes are possible
- Available in all RAL colours and in stainless steel
- Available for indoor and outdoor installation
- Secure against vandalism thanks to solid platform construction
- Display with status indication on platform
- TÜV approved according to EN 81-40



Low platform height and a 90° access ramp allow for easy access at lower landings



Landing controls with elegant design can be used as handheld controls or fixed to the wall

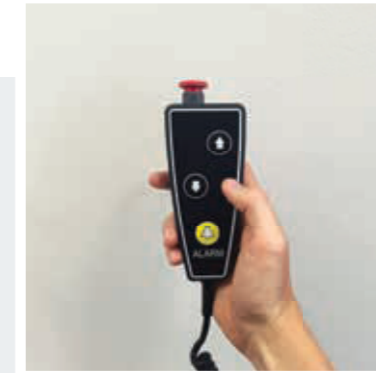

Handset on spiral cable on the platform allows for comfortable control of the lift while sitting on it




Joystick on platform as optional control function

Delta – Technical specification

Loading capacity	225 kg (optional 300 kg)
Platform width (min-max)	600-900 mm
Platform length (min-max)	700-1300 mm
Gradient	0-52°
Speed	0.06-0.12 m/s
Noise level	Under 60 dB
Temperature	+45°C to -15°C
Minimum folded width	300 mm
Power supply	1 × 230 V / 50-60 Hz
Basic colour	RAL 9007 or 7035

Certificates  TÜV certified according to EN 81-40

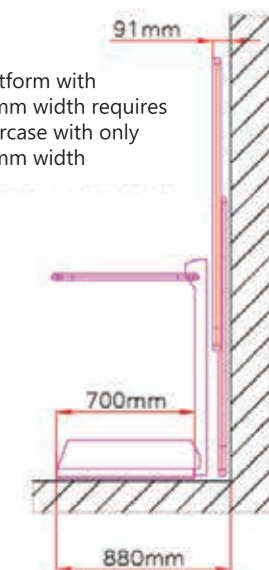




Platform stairlifts



Chair stairlifts



Vertical platformlifts



Stairclimbers



Poollift

Official partner of:

LEHNER
LIFTTECHNIK

Loc 1: Antelias, Seaside, SSS Bldg,
fifth floor beside AISHTI.

Loc 2: Bchamoun, Behind Louise
Wegmann School,
Andalos St. - SSS Bldg.

Tel: +961 71 260 007

Email: sales@sss-lb.com

www.sss-lb.com