

# DATASHEET

## LED EMERGENCY BULKHEAD



The emergency bulkhead is suitable for Ceiling or Wall mounted. Recessed accessory is available.




Hinged gear tray for easy installation

Can be used in Maintained or Non-maintained mode

Suitable for indoor or outdoor

## Dimensions

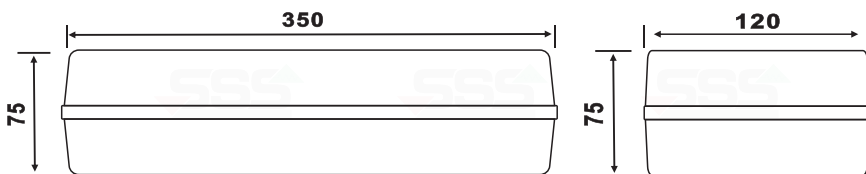

## Specification

Model No.: KE198/LED/M30

Mode of Operation: Maintained/  
Non-maintained

Power consumption: 4.5W

LED Type: SMD2835 30PCS

CCT: 3000-6500K

CRI: > 80

Battery Type: Ni-CD 3.6V 900mAh

Charging Time: 24H

Emergency Duration:  $\geq 3H$

Indicator: Green-Charging

Lumen output: AC: 180lm; DC: 150lm

Materials: PC base & PC diffuser milky

Self-adhesive exit sticker is available

Working Temperature: 0°C - 40°C

Warranty: 3 years

Test Standard: BS EN 60598-2-22  
BS EN 60598-1