


Description

Universal Clamp, tested according IEC 62561-1, Class "H" (Heavy duty), for connecting solid round (Ø8–10mm) or stranded (50–70 mm²) conductors or solid round (Ø8–10mm) or stranded (50–70 mm²) conductor to metallic surface up to 5 mm thickness. The clamp is composed out of two plates with dimensions 40x40x2 mm. The tightening is achieved by a carriage bolt M8x40 mm and a M8.

Typical applications

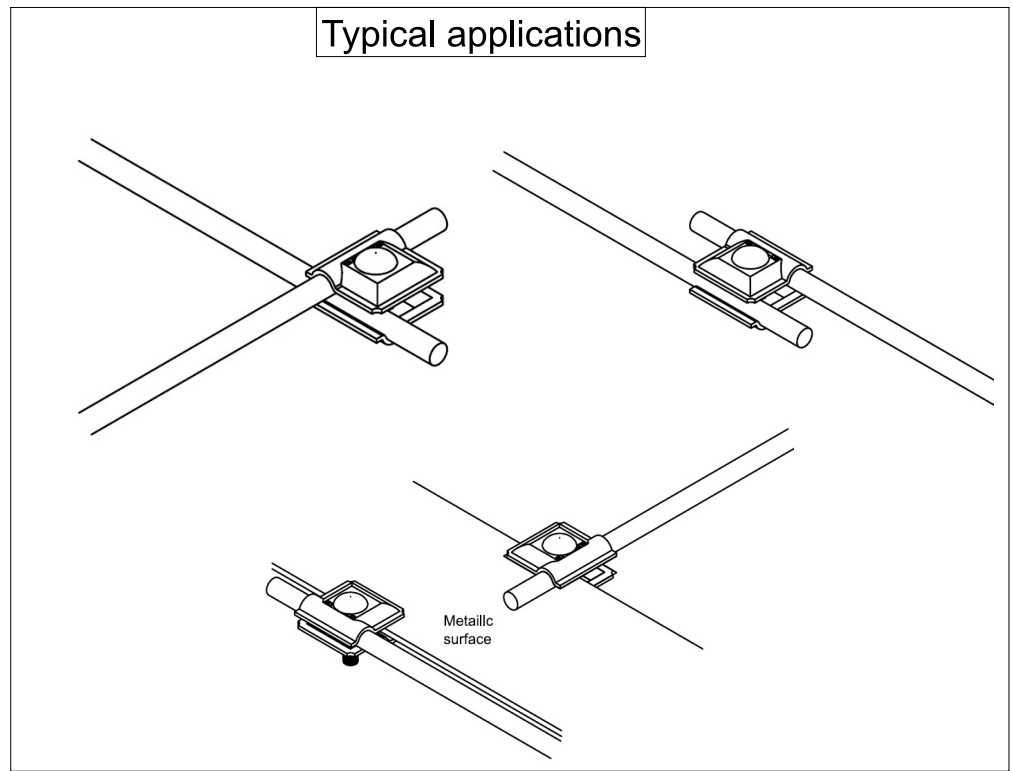

Description	Raw material	d ₁ /d ₂	Item code	Optional conductor (Round or stranded)
Universal connector-clamp	St/tZn	8-10 / 8-10	62 08 014	64 00 011
Universal connector-clamp	Cu	8-10 / 8-10	62 28 014	64 20 008
Universal connector-clamp	SSt/V2A	8-10 / 8-10	62 68 014	64 60 008

		Title:	
		Universal connector-clamp	
FIRST ISSUED	January 2017	Model	62 x8 014
DRAWN BY	Dionysopoulos G.		
CHECKED BY	Kokkinos D.		
APPROVED BY	Kokkinos D.		
SCALE	None		
ISSUANCE DATE	September 2021	SHEET 1 OF 1	

All dimensions in mm